


## Specifications Sheets

### Sheets with Adhesive Backing

Adhesive backing helps easy mounting.

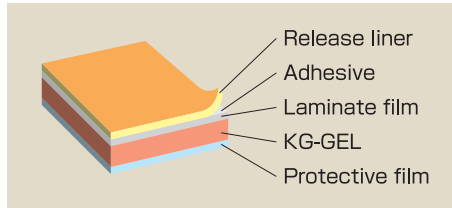


Part number	Material	Thickness (mm)*	Sheet size (mm)	Color
G80BK1-1.0-T1	YMG-80-BK (ASKER FP80)	1	305×213	Black
G80BK1-2.0-T1		2		
G80BK1-3.0-T1		3		
G80BK1-4.0-T1		4		
G80BK1-5.0-T1		5		

\* Total thickness of KG-GEL and laminate film

### Sheets with Urethane Film

Urethane film to control surface tackiness is applied either on one side or on both sides.


#### Urethane film on one side

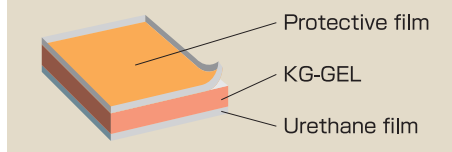

Part number	Material	Thickness (mm)*	Sheet size (mm)	Color
G5VU1-1.0	YMG-55V (ASKER FP55)	1	290×200	White
G5VU1-2.0		2		
G5VU1-3.0		3		
G5VU1-4.0		4		
G5VU1-5.0		5		

\* Total thickness of KG-GEL and urethane film

#### Urethane film on both sides

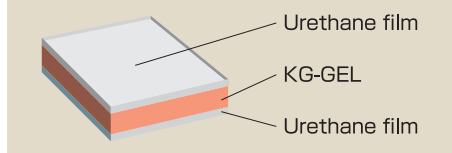


Part number	Material	Thickness (mm)*	Sheet size (mm)	Color
G5VU2-1.0**	YMG-55V (ASKER FP55)	1	290×200	White
G5VU2-2.0		2		
G5VU2-3.0		3		
G5VU2-4.0		4		
G5VU2-5.0		5		

\* Total thickness of KG-GEL and urethane film.


\*\*G5VU2-1.0 is a made-to-order product.

### Processing

It is possible to cut or die cut gel sheets to desired shape on request. Please contact us for other special processing.

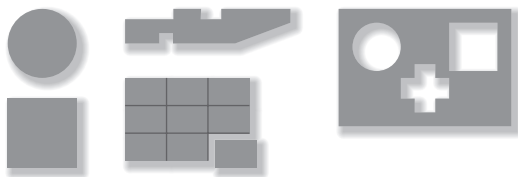


### Material Variety

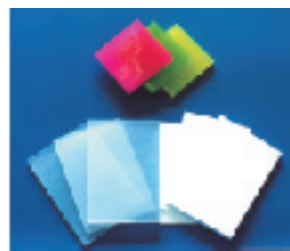

Hardness grades other than above-listed ones are also available on request. Please contact us for more details.

### Molded Components

We can also make original shape KG-GEL components by injection molding to meet your needs and applications. Kitagawa Industries offers total customer support system from design to prototyping, test and mass production.

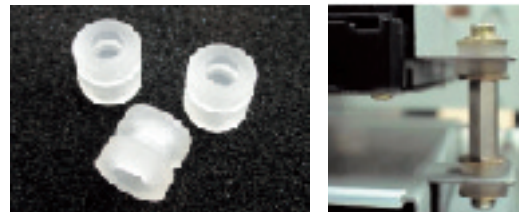

※ The data above are subject to change without notice due to product improvement. \*

※ Please contact us before use.