



# SOFT GASKET(NLCG series)

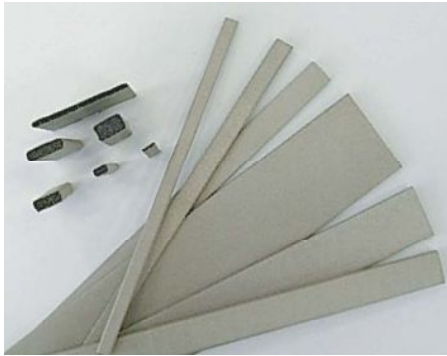

Stable electrical conductivity provided with low-compression force.

- Easy installation onto enclosure, etc. by adhesive tape. (Conductive adhesive tape is also available)
- Improved tape remains fewer stacks of adhesive stains upon removal.
- Easy processing by scissors. (Please contact sales division for custom processing)
- UL94 V-0 certified material.
- Suitable for distribution in Asian region.

## ■ Structure


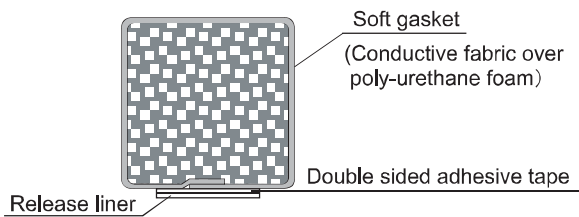


## ■ Size chart


◎:Conductive adhesive tape type is also available.

Vfoth(mm) Height(mm)	5	6	7	10	13	21	35
1	◎		◎	◎			
1.5	◎		◎	◎			
2	◎		◎	◎		●	●
3	◎						
4	◎			◎	●		
5	◎			◎			
6		●		●			
7				●			
10				●			
12				●			


## ■ Properties

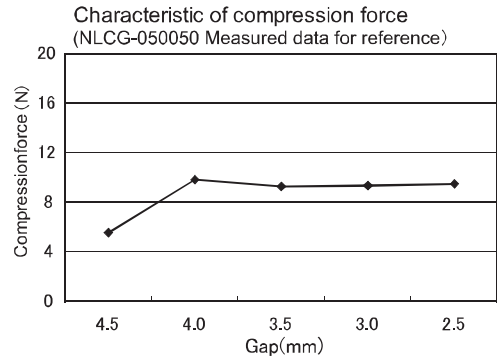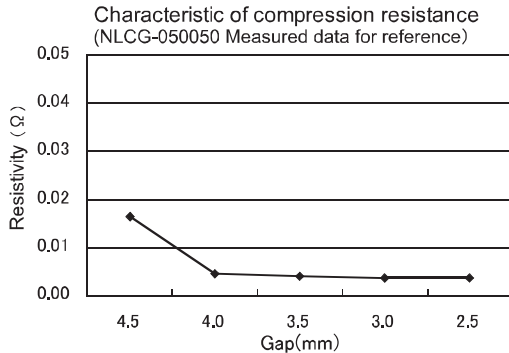


## ■ Processing



## ■ Application

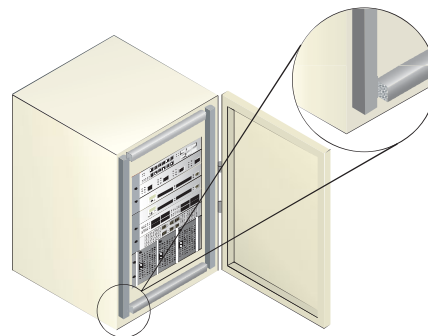

1. Shielding design for gap between metal enclosure and door structure













2. Stable grounding between PCB and Chassis

\* All specifications and characteristics shown herein are typical values, but are not guaranteed. All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.

# SOFT GASKET(NLCG series)

## ■ Dimensions

<p><b>NLCG-010050(D)</b></p>  <p>Height:1mm Width:5mm</p>	<p><b>NLCG-010070(D)</b></p>  <p>Height:1mm Width:7mm</p>	<p><b>NLCG-010100(D)</b></p>  <p>Height:1mm Width:10mm</p>	<p><b>NLCG-015050(D)</b></p>  <p>Height:1.5mm Width:5mm</p>
<p><b>NLCG-015070(D)</b></p>  <p>Height:1.5mm Width:7mm</p>	<p><b>NLCG-015100(D)</b></p>  <p>Height:1.5mm Width:10mm</p>	<p><b>NLCG-020050(D)</b></p>  <p>Height:2mm Width:5mm</p>	<p><b>NLCG-020070(D)</b></p>  <p>Height:2mm Width:7mm</p>
<p><b>NLCG-020100(D)</b></p>  <p>Height:2mm Width:10mm</p>	<p><b>NLCG-020210</b></p>  <p>Height:2mm Width:21mm</p>	<p><b>NLCG-020350</b></p>  <p>Height:2mm Width:35mm</p>	<p><b>NLCG-030050(D)</b></p>  <p>Height:3mm Width:5mm</p>
<p><b>NLCG-030100(D)</b></p>  <p>Height:3mm Width:10mm</p>	<p><b>NLCG-040050(D)</b></p>  <p>Height:4mm Width:5mm</p>	<p><b>NLCG-040100(D)</b></p>  <p>Height:4mm Width:10mm</p>	<p><b>NLCG-040130</b></p>  <p>Height:4mm Width:13mm</p>
<p><b>NLCG-050050(D)</b></p>  <p>Height:5mm Width:5mm</p>	<p><b>NLCG-050100(D)</b></p>  <p>Height:5mm Width:10mm</p>	<p><b>NLCG-060060</b></p>  <p>Height:6mm Width:6mm</p>	<p><b>NLCG-060100</b></p>  <p>Height:6mm Width:10mm</p>
<p><b>NLCG-070100</b></p>  <p>Height:7mm Width:10mm</p>	<p><b>NLCG-100100</b></p>  <p>Height:10mm Width:10mm</p>	<p><b>NLCG-120100</b></p>  <p>Height:12mm Width:10mm</p>	

Please contact to our sales for more size availability.

\*Suffix " D" means conductive adhesive tape.

\*All specifications and characteristics shown herein are typical values, but are not guaranteed.

All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.

**KGS** KITAGAWA INDUSTRIES CO.,LTD

KITAGAWA INDUSTRIES CO.,LTD.

Tel: 81-052-261-5521 <http://www.kitagawa-ind.com>

SHANGHAI KITAGAWA INDUSTRIES CO.,LTD.

Tel: 86-21-5865-2766

KITAGAWA INDUSTRIES(H.K.)LTD.

Tel: 852-2612-1161 <http://www.kitagawa.com.hk>

KITAGAWA INDUSTRIES(TAIWAN)CO.,LTD.

Tel: 886-2-2698-8833 <http://www.kgtw.com.tw>

KITAGAWA ELECTRONICS(THAILAND)CO.,LTD.

Tel: 66-35-350-201 <http://www.kitagawa-ind.com/thai/index.html>

KITAGAWA ELECTRONICS(SINGAPORE)PTE.LTD.

Tel: 65-6560-6511 <http://www.kitagawa.com.sg>

INTERMARK (USA), INC.

Tel: 1-408-971-2055 <http://www.intermark-usa.com>

KITAGAWA GmbH.

Tel: 49-6106-8524-0 <http://www.kitagawa.de>