

COOL PROVIDE (SPVS)



Flame Resistant,
High Performance
Thermally Conductive Sheet

High thermal conductivity : 5W/m·K


UL94V - 0 recognized

The inherent tackiness allows temporary fixation.

Thickness : 0.5 and 1.0 mm

Availability in custom required cut-to-piece.

Structure

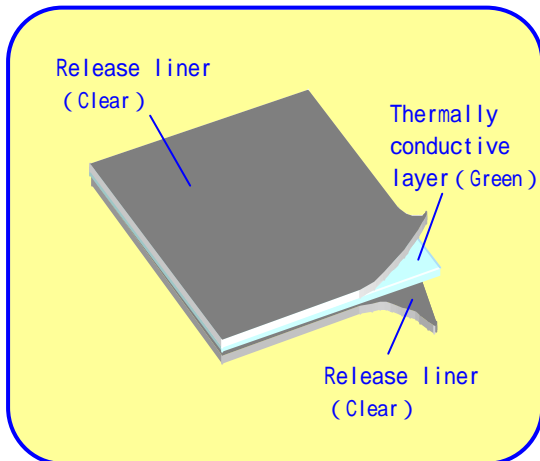


Properties (The data below are not guaranteed performance.)

Item	Test method	-
Thickness (mm)	-	0.5, 1.0
Base material		Silicone
Color		Green
Thermal conductivity (W/m·K)	QTM method	5
Flame rating	UL94	V-0

Various customized shapes are available to meet a wide variety of applications.

Available : Die-cut (round, square, rectangular, other special shapes, etc.), Kiss-cut

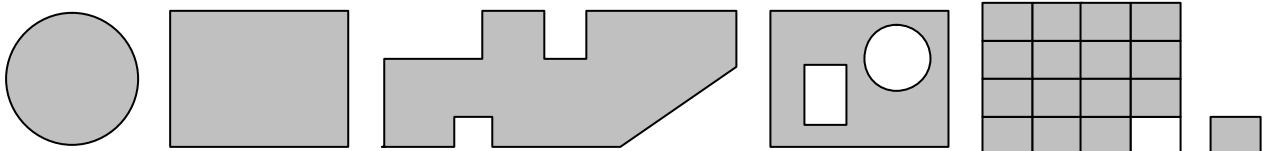

*The data above are subject to change without notice due to product improvement or specification change.