


# SIL-PAD (SP)

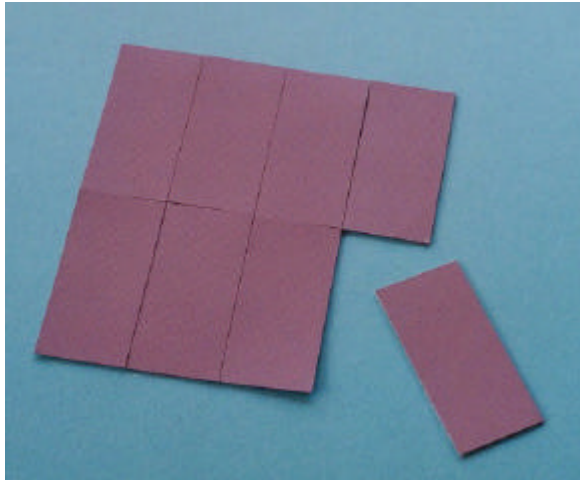

Effective for  
Thermal Management  
in Limited Spacing

## Features

Very thin thermally conductive sheet  
Thickness : 0.25mm

Thin yet highly conformable and strong

## Cross-sectional view



Release liner

Thermally conductive acrylic adhesive (natural)

Thermally conductive fiberglass carrier (mauve)

## Typical properties

(Not guaranteed values)

Item	Test method	Part number
		SP-0.25
Thickness (mm)		0.25
Color	Visual check	Mauve
Flame rating	UL94	V-0
Thermal conductivity (W/m K)	ASTM D5470	1.6